


ITEM	SYMBOL	MIN.	MAX.	UNIT
Power Supply(VDD)	V _{DD}	-0.3	7.0	V
Input Voltage	V _i	-0.3	V _{DD} +0.3	V
Operating Temp.	T _{opr}	-20	+70	°C
Storage Temp.	T _{stg}	-30	+80	°C

ITEM	STANDARD VALUE
Display Type	128 x 64 Dots
LCD Type	STN Y/G
Drive Method	1/65Duty, 1/9Bias, VOP: 9.0V
Viewing Angle	6 O'clock
Backlight Color	Yellow-Green
Control IC	ST7565R

Driver Diagram

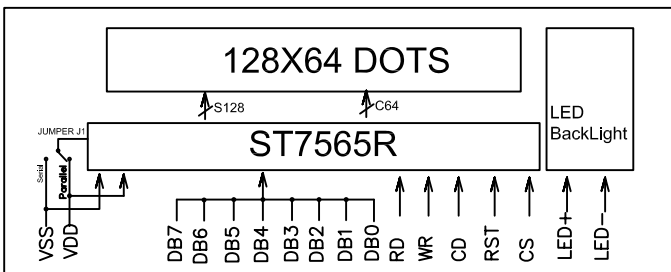

PIN DESCRIPTION			
PIN	SYMBOL	LEVEL	FUNCTION
1	VSS	0V	Ground
2	VDD	H	Power Supply For Logic
3	NC	--	NC
4	A0	H/L	L:Instrection Code H:Data Code
5	RW	L	Read AND Write Signal
6	CS	L	Chip Select
7-14	DB0-DB7	H/L	Data Bus
15	E	H	Chip Enable Signal
16	RST	L	Reset Signal
17	LEDA	H	Backlight anod
18	LEDK	L	Backlight Negative